



## Dimensions

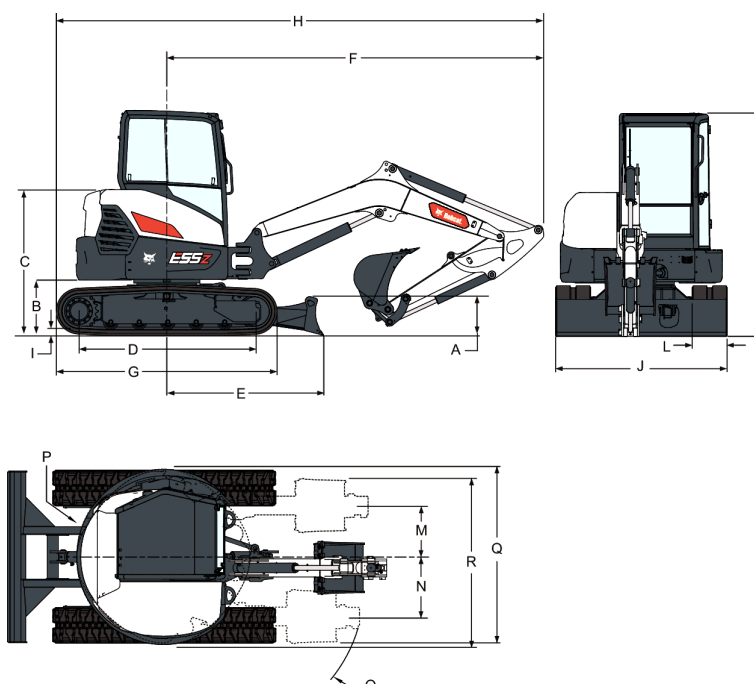

(A) Blade height	422.0 mm
(B) Clearance, upper structure to ground line	627.0 mm
(C) Ground line to top of engine cover	1659.0 mm
(D) Length of track on ground	2004.0 mm
(E) Machine centre line to blade	1784.0 mm
(F) Minimum radius in travel position	4300.0 mm
(F*) Minimum radius in travel position, long dipperstick	4297.0 mm
(G) Overall length of track assembly	2523.0 mm
(H) Overall length in travel position	5561.0 mm
(H*) Overall length in travel position, long dipperstick	5558.0 mm
(I) Track lug height	24.0 mm
(J) Blade width	1959.0 mm
(K) Height	2566.0 mm
(L) Track width	400.0 mm
(M) Machine centre line to working equipment centre line, left-hand rotation	586.0 mm
(N) Machine centre line to working equipment centre line, right-hand rotation	872.0 mm
(O) Minimum turning radius	2027.0 mm
(P) Swing clearance, rear	1000.0 mm
(P*) Swing clearance, rear heavy counterweight	1071.0 mm
(Q) Working width at maximum right-hand rotation	1976.0 mm
(Q*) Working width at maximum right-hand rotation, long dipperstick	2046.0 mm
(R) Working width at maximum left-hand rotation	1881.0 mm
(R*) Working width at maximum left-hand rotation, long dipperstick	2035.0 mm
(•) Boom length (boom pivot to arm pivot)	2775.0 mm
(•) Standard arm length (arm pivot to bucket pivot)	1525.0 mm
(•) Optional arm length (arm pivot to bucket pivot)	1925.0 mm
<i>(Values with a "*" are for the long dipperstick)</i>	

## Working Range

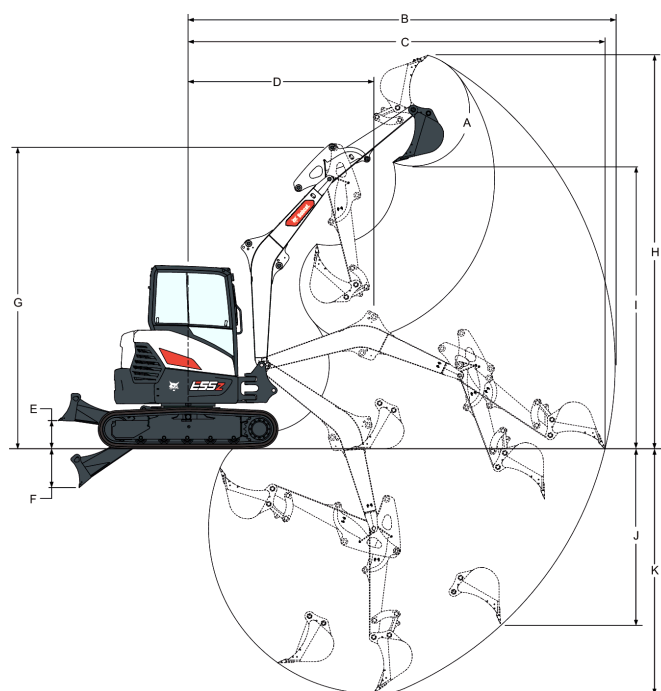

(A) Bucket pivot angle	186.0°
(B) Maximum reach of working equipment	5983.0 mm
(B) Maximum reach of working equipment, long dipperstick	6361.0 mm
(C) Maximum reach at ground level	5843.0 mm
(C*) Maximum reach at ground level, long dipperstick	6232.0 mm
(D) Maximum working equipment radius with boom at maximum height and dipperstick fully retracted	2541.0 mm
(D*) Maximum working equipment radius with boom at maximum height and dipperstick fully retracted, long dipperstick	2638.0 mm
(E) Maximum blade height	390.0 mm
(F) Maximum blade depth	547.0 mm
(G) Maximum height of working equipment with dipperstick retracted	4272.0 mm
(G*) Maximum height of working equipment with dipperstick retracted, long dipperstick	4273.0 mm
(H) Maximum bucket tooth height	5513.0 mm
(H*) Maximum bucket tooth height, long dipperstick	5768.0 mm
(I) Maximum dump height	3558.0 mm
(I*) Maximum dump height, long dipperstick	4213.0 mm
(J) Maximum depth of vertical wall which can be excavated	2485.0 mm
(J*) Maximum depth of vertical wall which can be excavated, long dipperstick	2878.0 mm
(K) Maximum digging depth	3434.0 mm
(K*) Maximum digging depth, long dipperstick	3834.0 mm

(Values with a "\*" are for the long dipperstick)